PERMA-TITE DOUBLE TAPERED COPING


3'-0" O.C.

INSTALLATION INSTRUCTIONS


IMPORTANT: Prior to installation, read instructions carefully.

NOTE: Position roof membrane on top of the wall covering the treated wood nailer(s) or substrate completely. Allow 1/2" minimum excess membrane beyond nailer where applicable. NRCA requirement.


CAUTION: INSTALL MITERS FIRST!

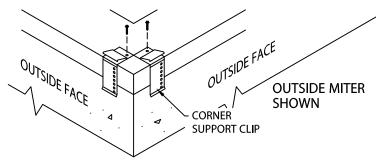



STEP 1 - CORNER SUPPORT CLIPS LOCATE AND FASTEN GALVANIZED CORNER SUPPORT CLIPS TO THE WALL.





STEP 2 - MITER SPLICE PLATES & ANCHOR CLIPS POSITION THE SPLICE PLATE IN THE CENTER OF THE ANCHOR CLIP. INSTALL THE SPLICE PLATE AND ANCHOR CLIP ASSEMBLY INTO EACH END OF THE MITER AS SHOWN

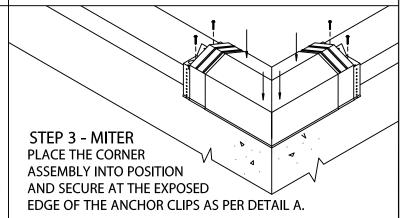

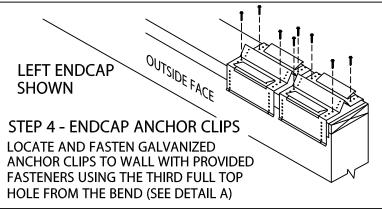

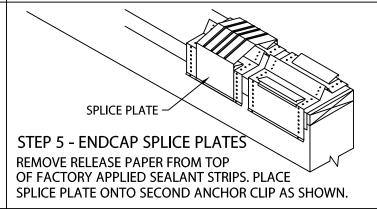

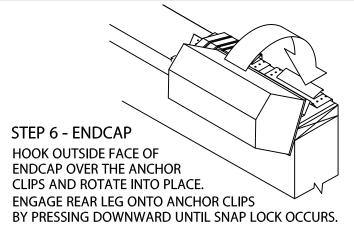

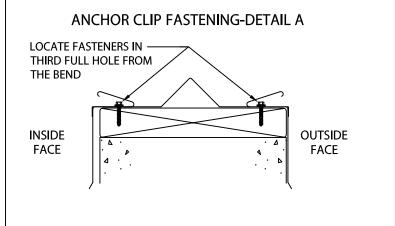



Phone: 800-558-2162 Fax: 800-373-9156 www.metalera.com

DATE: 11/02/21 DRN BY: ZS DWG# 11111-1243

CKD BY: MM

SHT.# 1 OF 2


PERMA-TITE DOUBLE TAPERED COPING


3'-0" O.C

INSTALLATION INSTRUCTIONS

INSTALLATION NOTES:


- 1) Installing contractor shall check as-built conditions, including nailer attachment, and verify the manufacturer's coping details for accuracy to fit the wall assembly prior to fabrication.
- 2) Fasteners must be corrosion resistant and rated for a minimum 250# pullout force for the substrate that is being used.

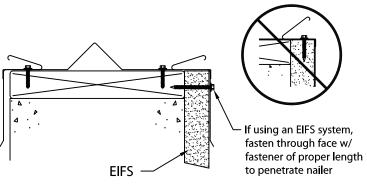



STEP 8 - SPLICE PLATES
PLACE SPLICE PLATE ONTO ANCHOR CLIPS
AT SPLICE JOINTS, 12'-0" O.C.


NOTE: REMOVE RELEASE PAPER FROM SEALANT STRIPS.




STEP 10 - COMPLETION

CONTINUE INSTALLING COPING WITH A 3/8" SPACE AT SPLICE JOINTS TO ALLOW FOR THERMAL EXPANSION. FIELD CUT WHERE NECESSARY USING FINE TOOTH HACKSAW OR SNIPS.

NOTE: REMOVE PROTECTIVE FILM IMMEDIATELY.

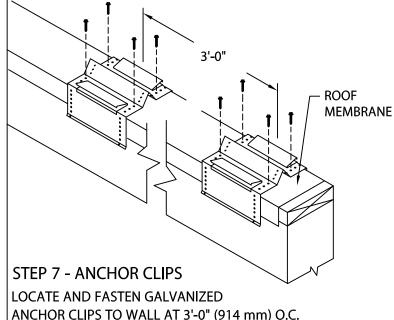

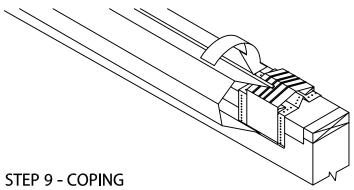


WITH PROVIDED FASTENERS USING THE THIRD FULL

TOP HOLE FROM THE BEND (SEE DETAIL A)

HOOK OUTSIDE FACE OF COPING OVER THE ANCHOR CLIPS AND ROTATE INTO PLACE. ENGAGE REAR LEG ONTO ANCHOR CLIPS BY PRESSING DOWNWARD UNTIL SNAP LOCK OCCURS.

TYPICAL COPING INSTALLATION

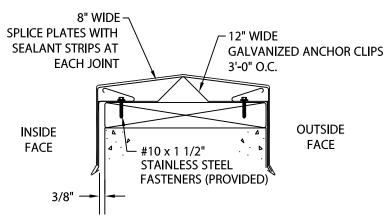



Phone: 800-558-2162 Fax: 800-373-9156 www.metalera.com DATE: 11/02/21 SHT.# 2 OF 2

DRN BY: ZS

DWG# 11111-1243

CKD BY: MM DWG# 11111-1243