


REFERENCE DETAIL:

# HI-PERF HIGH VELOCITY RIDGE VENT

SLOPE TO SLOPE, SHINGLED VERSION WITH DEFLECTORS

Z BRACKET, INTERMITTENT SPACERS AND EXPANDED METAL SUPPORT SCREEN ARE ALL FACTORY ASSEMBLED

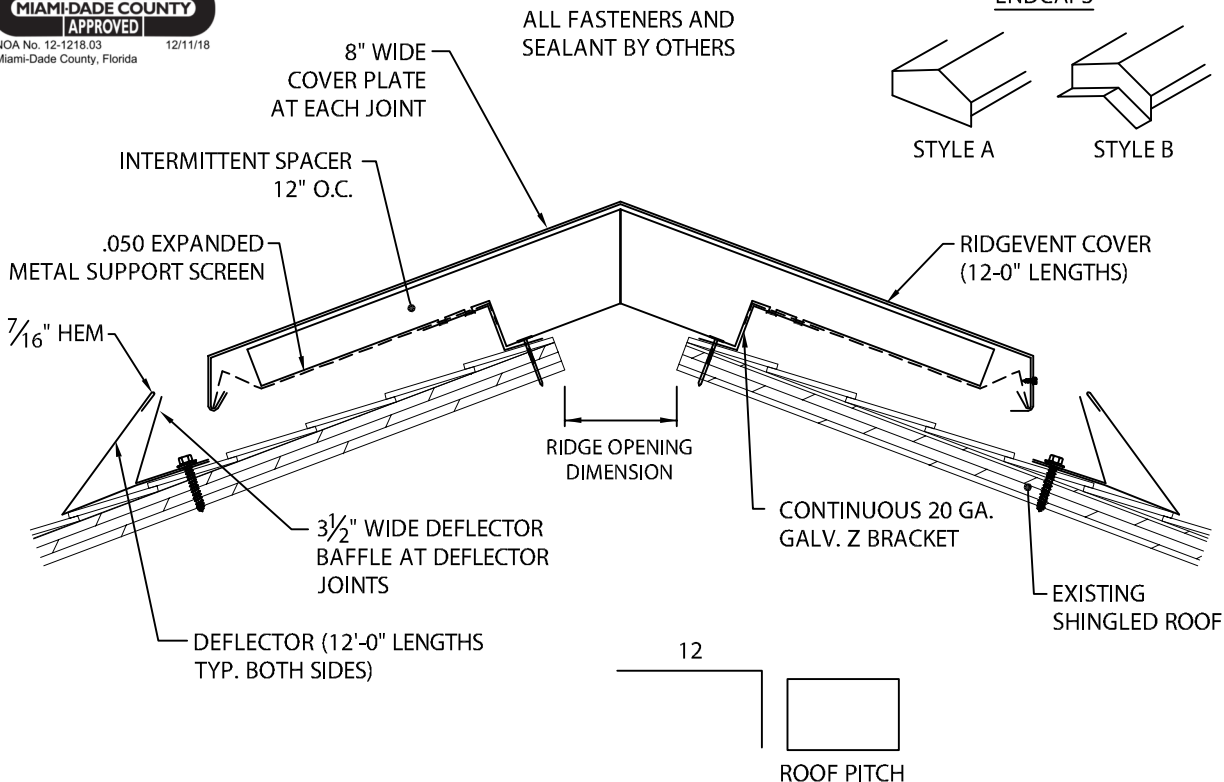

U.S. PATENT # 8,075,376 B1

THE RIDGE OPENING MAY BE PROVIDED BY ONE OF TWO METHODS:

1. THE ACTUAL KNOWN

RIDGE OPENING OR  NFA

OR

2. FIELD OR PLAN CONDITION MEASUREMENTS:

ACTUAL LINEAL FOOTAGE OF RIDGE  ACTUAL LINEAL FOOTAGE OF EAVE

VENTILATION TYPE:

VENTED NAILBASE  
 \_\_\_\_\_ AIR SPACE DIMENSION OF VENTED NAILBASE

OR

ATTIC  
 \_\_\_\_\_ ATTIC FLOOR SQUARE FOOTAGE  
 \_\_\_\_\_ RIDGE BEAM WIDTH IF APPLICABLE

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

### COVER MATERIAL:

- 24 GA. GALV. STEEL  .040" ALUMINUM
- .050" ALUMINUM  .063" ALUMINUM
- OTHER \_\_\_\_\_

COLOR: \_\_\_\_\_ FINISH: \_\_\_\_\_

### QUANTITIES:

\_\_\_\_\_ LINEAL FEET (12'-0" LENGTHS)

\_\_\_\_\_ ENDCAP(S) (12" LENGTHS, COVER ONLY)

\_\_\_\_\_ STYLE A \_\_\_\_\_ STYLE B

PROJECT:

ARCHITECT:

CONTRACTOR:

REPRESENTATIVE:



Phone: 800-558-2162  
 Fax: 800-770-3934  
 www.metalera.com

DATE: 05/16/17

SHT.# \_\_\_ OF \_\_\_

DRN BY: JJC

CKD BY: SAK

DWG# 31024-19815

D